



PK6H6BA

N-Channel Enhancement Mode MOSFET

PRODUCT SUMMARY

| | | |
|---------------|------------------------|-------|
| $V_{(BR)DSS}$ | $R_{DS(ON)}$ | I_D |
| 30V | 7.8mΩ @ $V_{GS} = 10V$ | 46A |

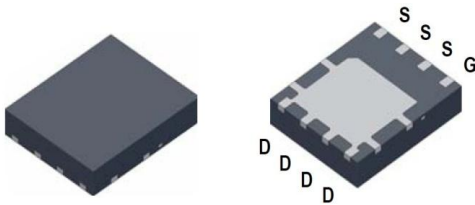

100% UIS Tested
100% Rg Tested

PDFN 5X6P

ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ °C}$ Unless Otherwise Noted)

| PARAMETERS/TEST CONDITIONS | | SYMBOL | LIMITS | UNITS |
|--|-----------------------|----------------|------------|-------|
| Drain-Source Voltage | | V_{DS} | 30 | V |
| Gate-Source Voltage | | V_{GS} | ±20 | V |
| Continuous Drain Current ⁴ | $T_C = 25\text{ °C}$ | I_D | 46 | A |
| | $T_C = 100\text{ °C}$ | | 29 | |
| Pulsed Drain Current ¹ | | I_{DM} | 100 | |
| Continuous Drain Current | $T_A = 25\text{ °C}$ | I_D | 16 | |
| | $T_A = 70\text{ °C}$ | | 13 | |
| Avalanche Current | | I_{AS} | 22 | |
| Avalanche Energy | $L = 0.1\text{mH}$ | E_{AS} | 24 | mJ |
| Power Dissipation | $T_C = 25\text{ °C}$ | P_D | 31 | W |
| | $T_C = 100\text{ °C}$ | | 12.5 | |
| Power Dissipation ³ | $T_A = 25\text{ °C}$ | P_D | 4 | W |
| | $T_A = 70\text{ °C}$ | | 2.6 | |
| Operating Junction & Storage Temperature Range | | T_J, T_{stg} | -55 to 150 | °C |

THERMAL RESISTANCE RATINGS

| THERMAL RESISTANCE | | SYMBOL | TYPICAL | MAXIMUM | UNITS |
|----------------------------------|---------------------|-----------------|---------|---------|--------|
| Junction-to-Ambient ² | $t \leq 10\text{s}$ | $R_{\theta JA}$ | | 30 | °C / W |
| Junction-to-Ambient ² | Steady-State | $R_{\theta JA}$ | | 60 | |
| Junction-to-Case | Steady-State | $R_{\theta JC}$ | | 4 | |

¹Pulse width limited by maximum junction temperature.

²The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25\text{ °C}$.

³The Power dissipation is based on $R_{\theta JA} t \leq 10\text{s}$ value.

⁴Package limitation current is 29A.

PK6H6BA

N-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS (T_J = 25 °C, Unless Otherwise Noted)

| PARAMETER | SYMBOL | TEST CONDITIONS | LIMITS | | | UNITS |
|---|----------------------|--|---|------|------|-------|
| | | | MIN | TYP | MAX | |
| STATIC | | | | | | |
| Drain-Source Breakdown Voltage | V _{(BR)DSS} | V _{GS} = 0V, I _D = 250μA | 30 | | | V |
| Gate Threshold Voltage | V _{GS(th)} | V _{DS} = V _{GS} , I _D = 250μA | 1.35 | 1.75 | 2.3 | |
| Gate-Body Leakage | I _{GSS} | V _{DS} = 0V, V _{GS} = ±20V | | | ±100 | nA |
| Zero Gate Voltage Drain Current | I _{DSS} | V _{DS} = 24V, V _{GS} = 0V | | | 1 | μA |
| | | V _{DS} = 20V, V _{GS} = 0V, T _J = 55 °C | | | 10 | |
| Drain-Source On-State Resistance ¹ | R _{DS(ON)} | V _{GS} = 4.5V, I _D = 13A | | 7.2 | 11 | mΩ |
| | | V _{GS} = 10V, I _D = 13A | | 5.5 | 7.8 | |
| Forward Transconductance ¹ | g _{fs} | V _{DS} = 5V, I _D = 13A | | 54 | | S |
| DYNAMIC | | | | | | |
| Input Capacitance | C _{iss} | V _{GS} = 0V, V _{DS} = 15V, f = 1MHz | | 857 | | pF |
| Output Capacitance | C _{oss} | | | 147 | | |
| Reverse Transfer Capacitance | C _{rss} | | | 105 | | |
| Gate Resistance | R _g | V _{GS} = 0V, V _{DS} = 0V, f = 1MHz | | 1 | | Ω |
| Total Gate Charge ² | Q _g | V _{GS} = 10V | V _{DS} = 15V, I _D = 13A | 18 | | nC |
| | | V _{GS} = 4.5V | | 10 | | |
| Gate-Source Charge ² | Q _{gs} | 1.9 | | | | |
| Gate-Drain Charge ² | Q _{gd} | 5.2 | | | | |
| Turn-On Delay Time ² | t _{d(on)} | V _{DS} = 15V, I _D ≅ 13A, V _{GS} = 10V, R _{GEN} = 6Ω | | 28 | | nS |
| Rise Time ² | t _r | | | 24 | | |
| Turn-Off Delay Time ² | t _{d(off)} | | 50 | | | |
| Fall Time ² | t _f | | 25 | | | |
| SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_J = 25 °C) | | | | | | |
| Continuous Current | I _S | | | | 25 | A |
| Forward Voltage ¹ | V _{SD} | I _F = 13A, V _{GS} = 0V | | | 1.2 | V |
| Reverse Recovery Time | t _{rr} | I _F = 13A, di _F /dt = 100A / μS | | 7.5 | | nS |
| Reverse Recovery Charge | Q _{rr} | | | 1.5 | | nC |


¹Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

²Independent of operating temperature.


PK6H6BA

N-Channel Enhancement Mode MOSFET


Output Characteristics

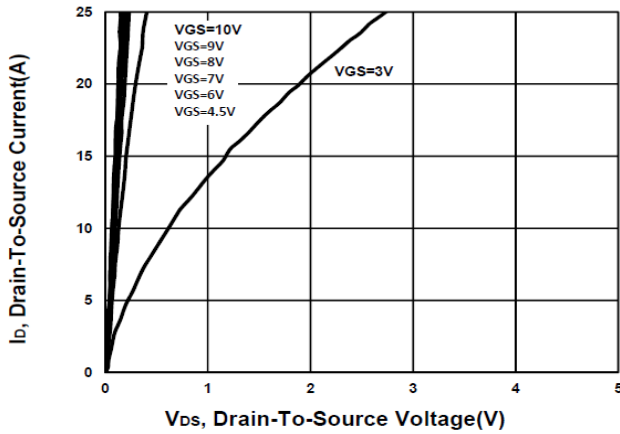


Transfer Characteristics

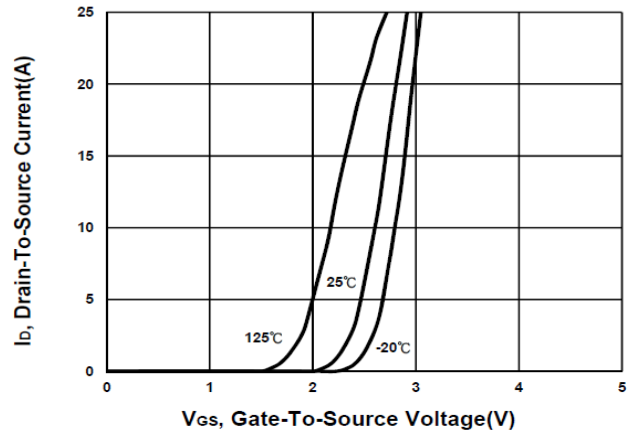


Gate charge Characteristics

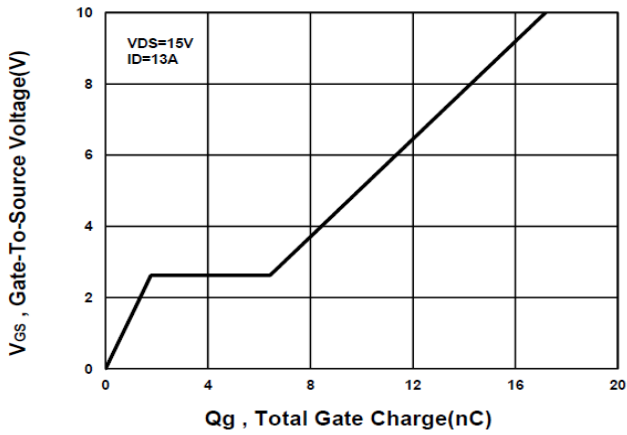


Capacitance Characteristic

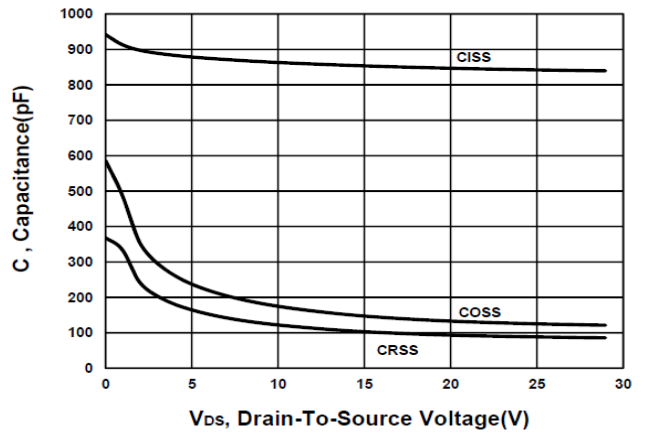

On-Resistance VS Gate-To-Source

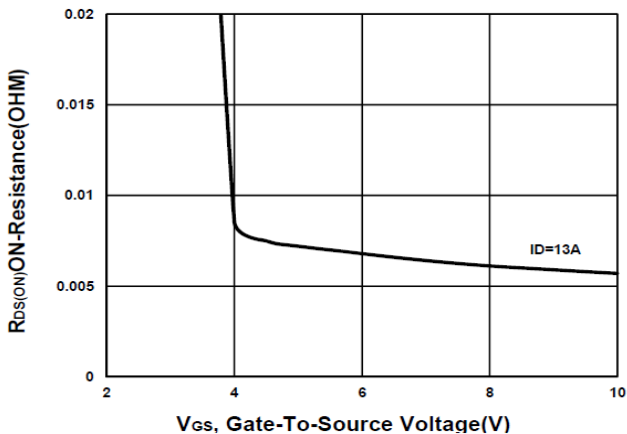


On-Resistance VS Drain Current

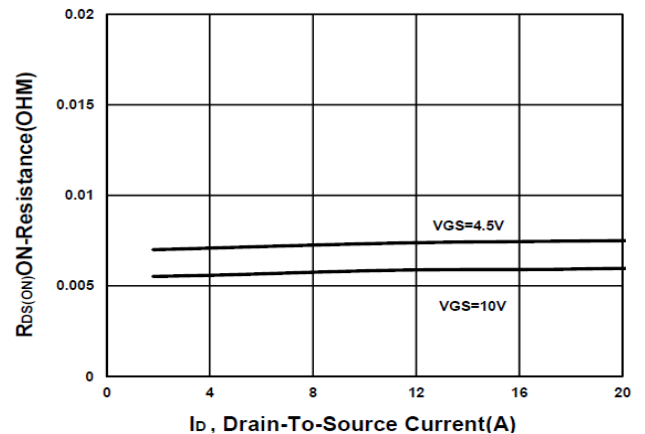


PK6H6BA

N-Channel Enhancement Mode MOSFET


On-Resistance VS Temperature

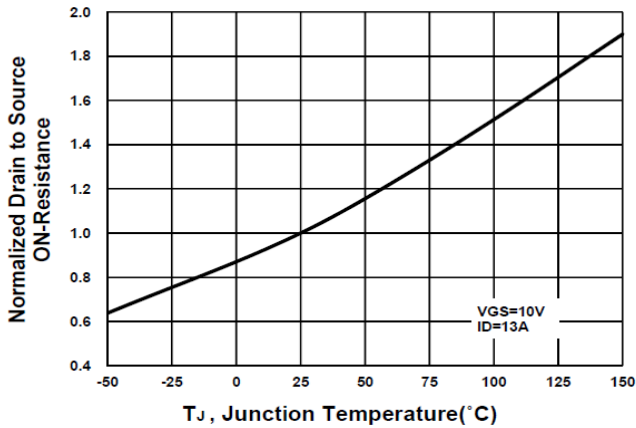


Source-Drain Diode Forward Voltage

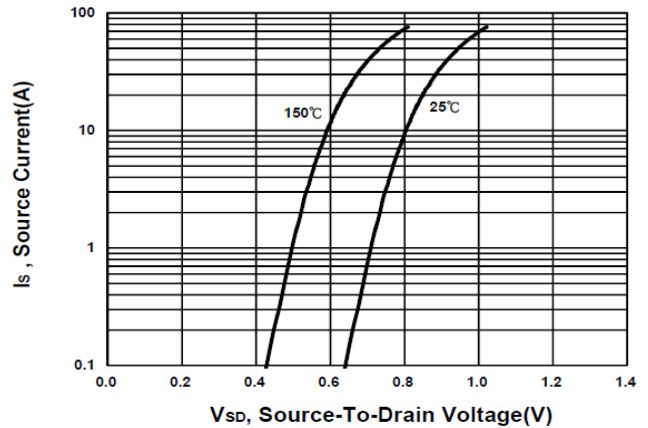


Safe Operating Area

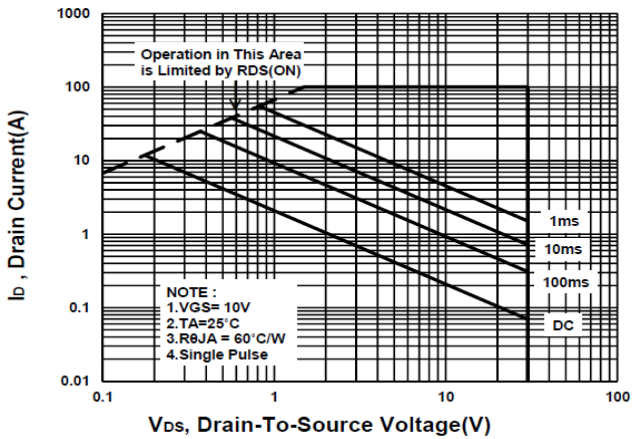

Single Pulse Maximum Power Dissipation

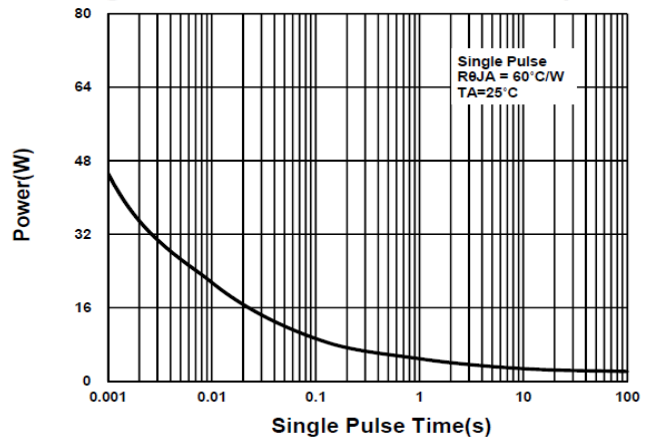

Transient Thermal Response Curve

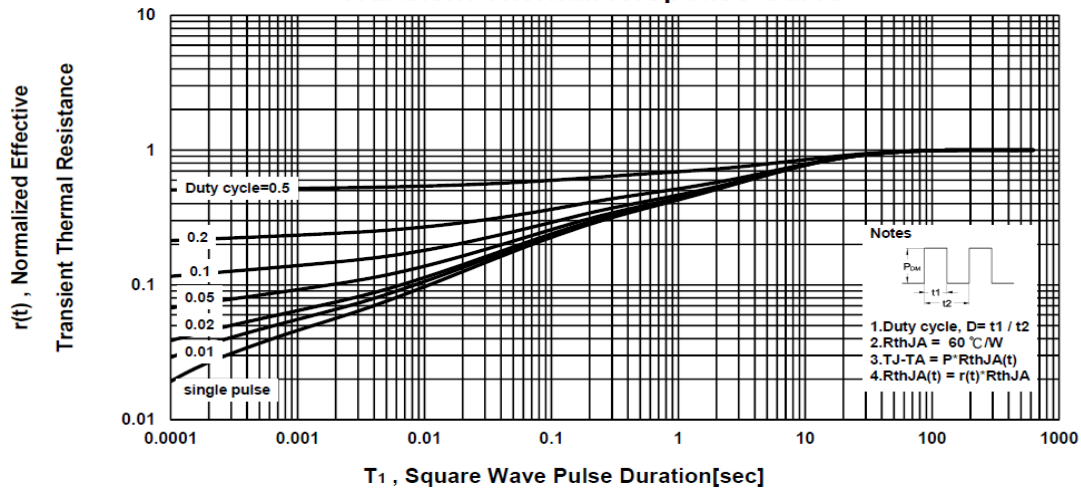


PK6H6BA

N-Channel Enhancement Mode MOSFET

Package Dimension


PDFN 5x6P MECHANICAL DATA

| Dimension | mm | | | Dimension | mm | | |
|-----------|------|------|------|-----------|------|------|-------|
| | Min. | Typ. | Max. | | Min. | Typ. | Max. |
| A | 4.8 | | 5.15 | J | 3.34 | | 3.9 |
| B | 5.42 | | 5.9 | K | 0.9 | | |
| C | 5.9 | | 6.35 | L | 0.38 | | 0.711 |
| D | 0.3 | | 0.51 | M | 0° | | 12° |
| E | 1.17 | 1.27 | 1.37 | N | 4.8 | | 5.4 |
| F | 0.8 | 1 | 1.2 | O | 0.05 | | 0.36 |
| G | 0.15 | | 0.35 | P | 0.05 | | 0.25 |
| H | 3.67 | | 4.31 | S | 3.73 | | 4.19 |
| I | 0.38 | | 0.71 | | | | |

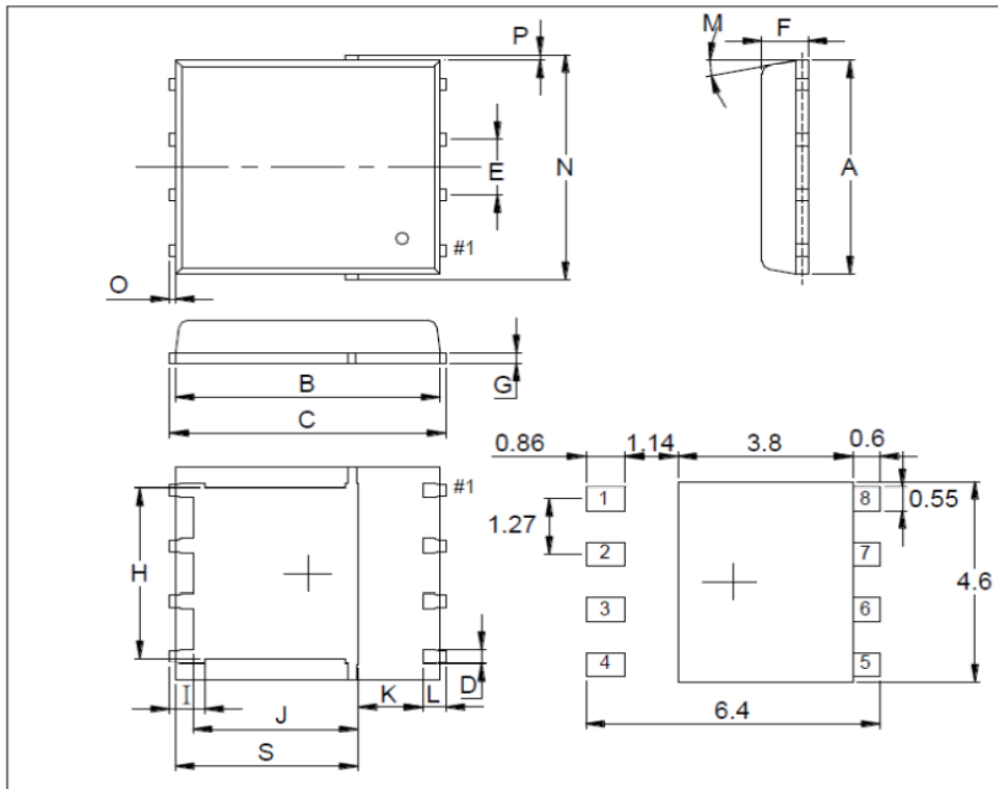


PK6H6BA
N-Channel Enhancement Mode MOSFET

A. Marking Information

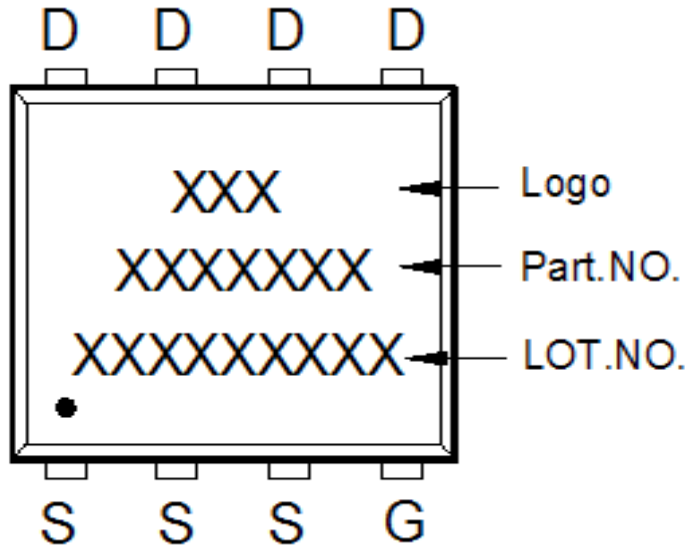


B. Tape&Reel Information:3000pcs/Reel

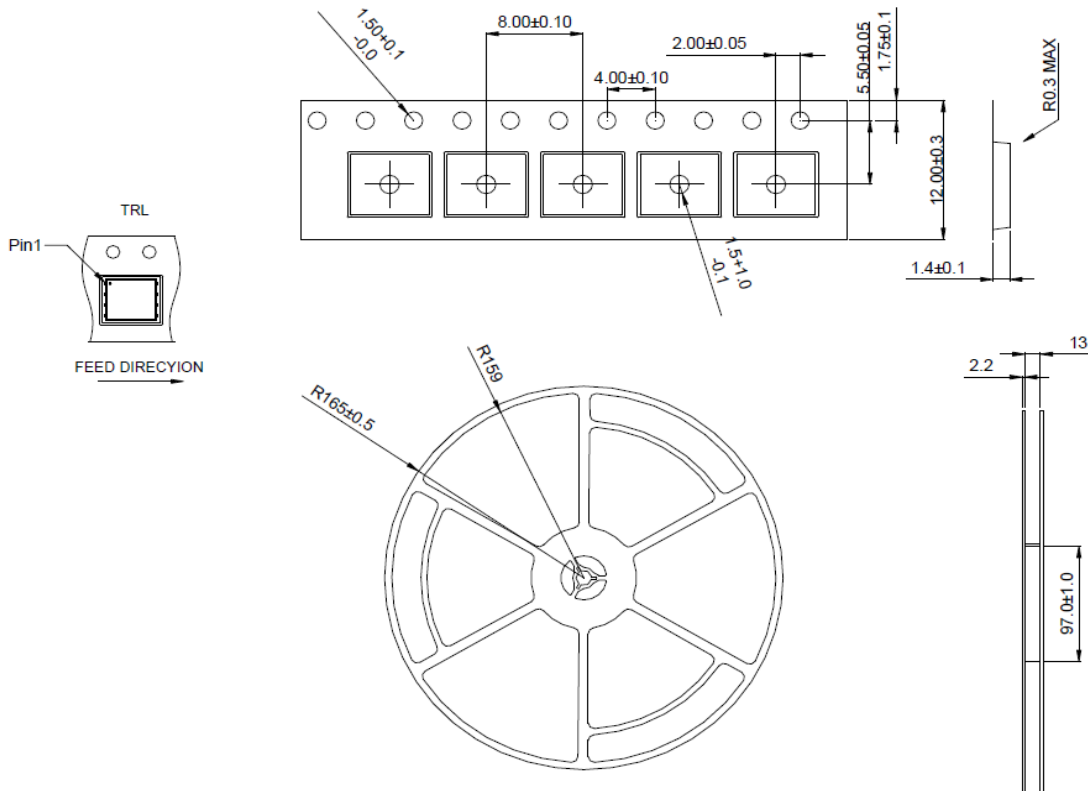


PK6H6BA
N-Channel Enhancement Mode MOSFET

C. Lot No.&Date Code rule

1. Lot No.

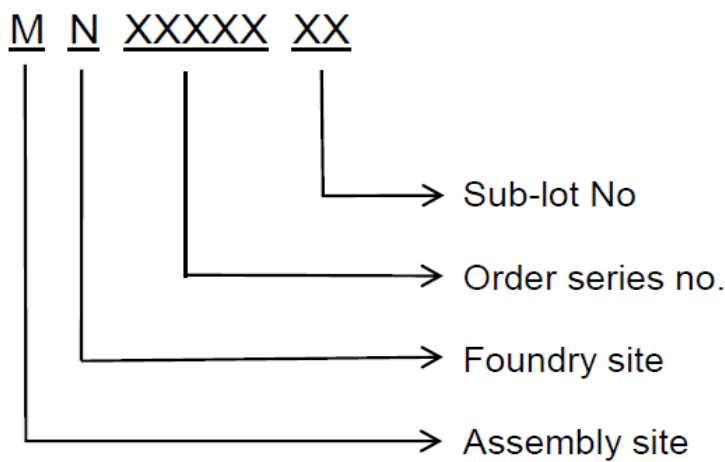

2. Date Code

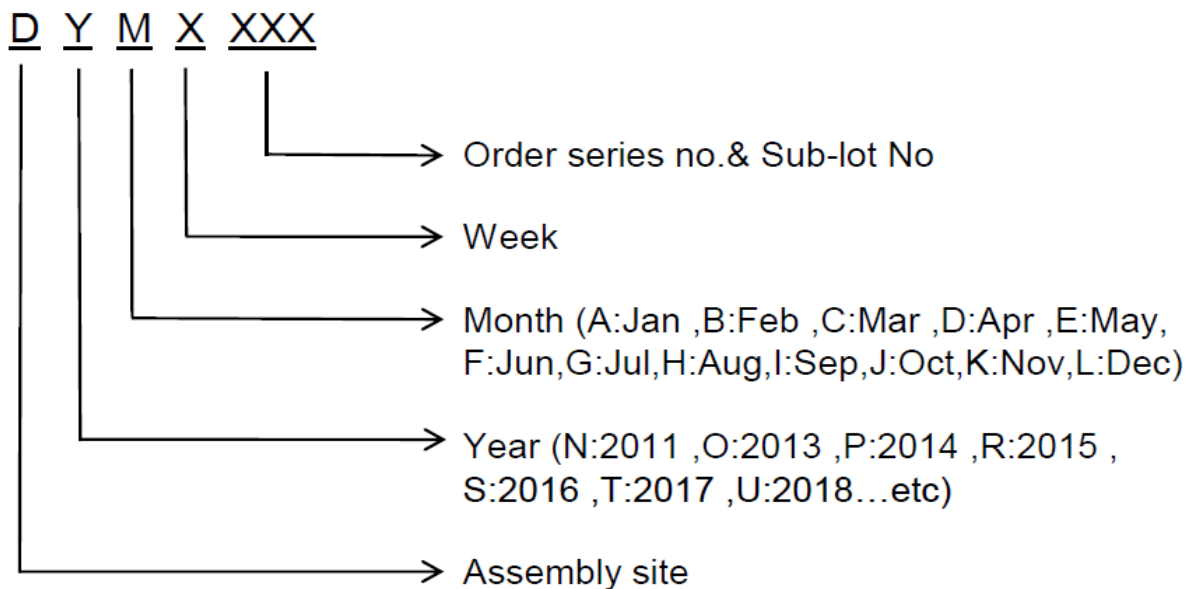



PK6H6BA

N-Channel Enhancement Mode MOSFET

D.Label rule

标签内容(Label content)



| | | |
|----|--------------------|---|
| 1 | Label Size | 30 * 90 mm |
| 2 | Font style | Times New Roman or Arial (或可区分英文”0”和数字”0”，”G和”Q”的字型即可) |
| 3 | U-NIKC | Height: 4 mm |
| 4 | Package | Height: 2 mm |
| 5 | Date | Height: 2 mm Shipping date: YYYY/MM/DD, ex. 2008/09/12 |
| 6 | Device | Height: 3 mm (Max: 16 Digit) |
| 7 | Lot | Height: 3 mm (Max: 9 Digit) Sub lot |
| 8 | D/C | Height: 3 mm (Max: 7 Digit) |
| 9 | QTY | Height: 3 mm (Max: 6 Digit) Thousand mark is no needed |
| 10 | RoHS label |  long axis: 12 mm minor axis:6 mm bottom color: White Font color: Black Font style: Arial |
| 11 | Halogen Free label |  Diameter: 10 mm bottom color: Green Font color: Black Font style: Arial |
| 12 | Scan information | Device / Lot / D/C / QTY , Insert “ / “ between every parts. for example: P3055LDG/G12345601/GGG2301/2000 DPI (Dots per inch): Over 300 dpi Code : Code 128 Height: 6 mm at least |