

1. STANDARD APPEARANCE



2. BLOCK DIAGRAM

KABYLAKE


Rev 1.00

2016.03


[Toggle FullScreen](#)

[Pre Page](#)


[Ne:](#)

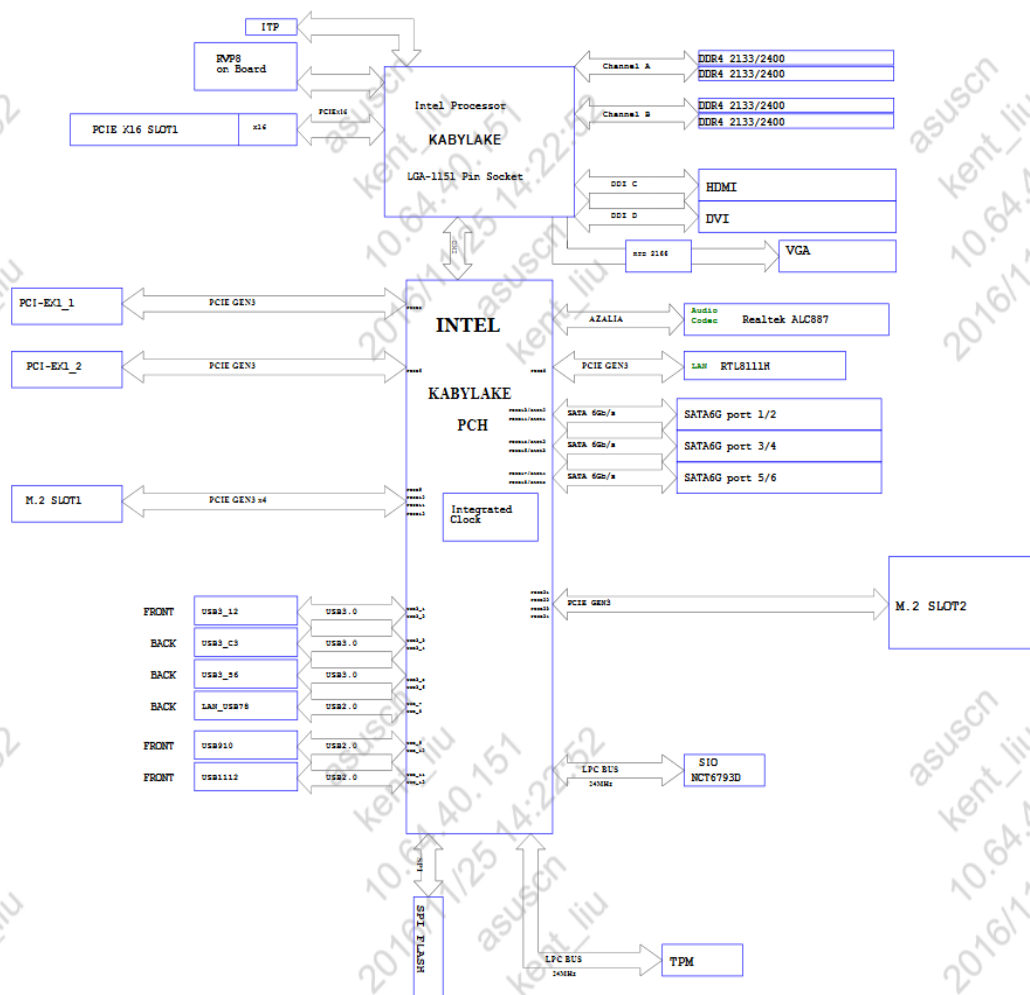

Device	Power	Temperature	Humidity	Pressure	Altitude	Location	Time
asuscn	+12V_CPU						2016/11/25 14:27:03
kent_liu	+12V						
10.64.40.151	+5V						
2016/11/25 14:27:03							
asuscn	+5V5B_AT						
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							
10.64.40.151							
2016/11/25 14:27:03							
asuscn							
kent_liu							




4. POWER ON SEQUENCE

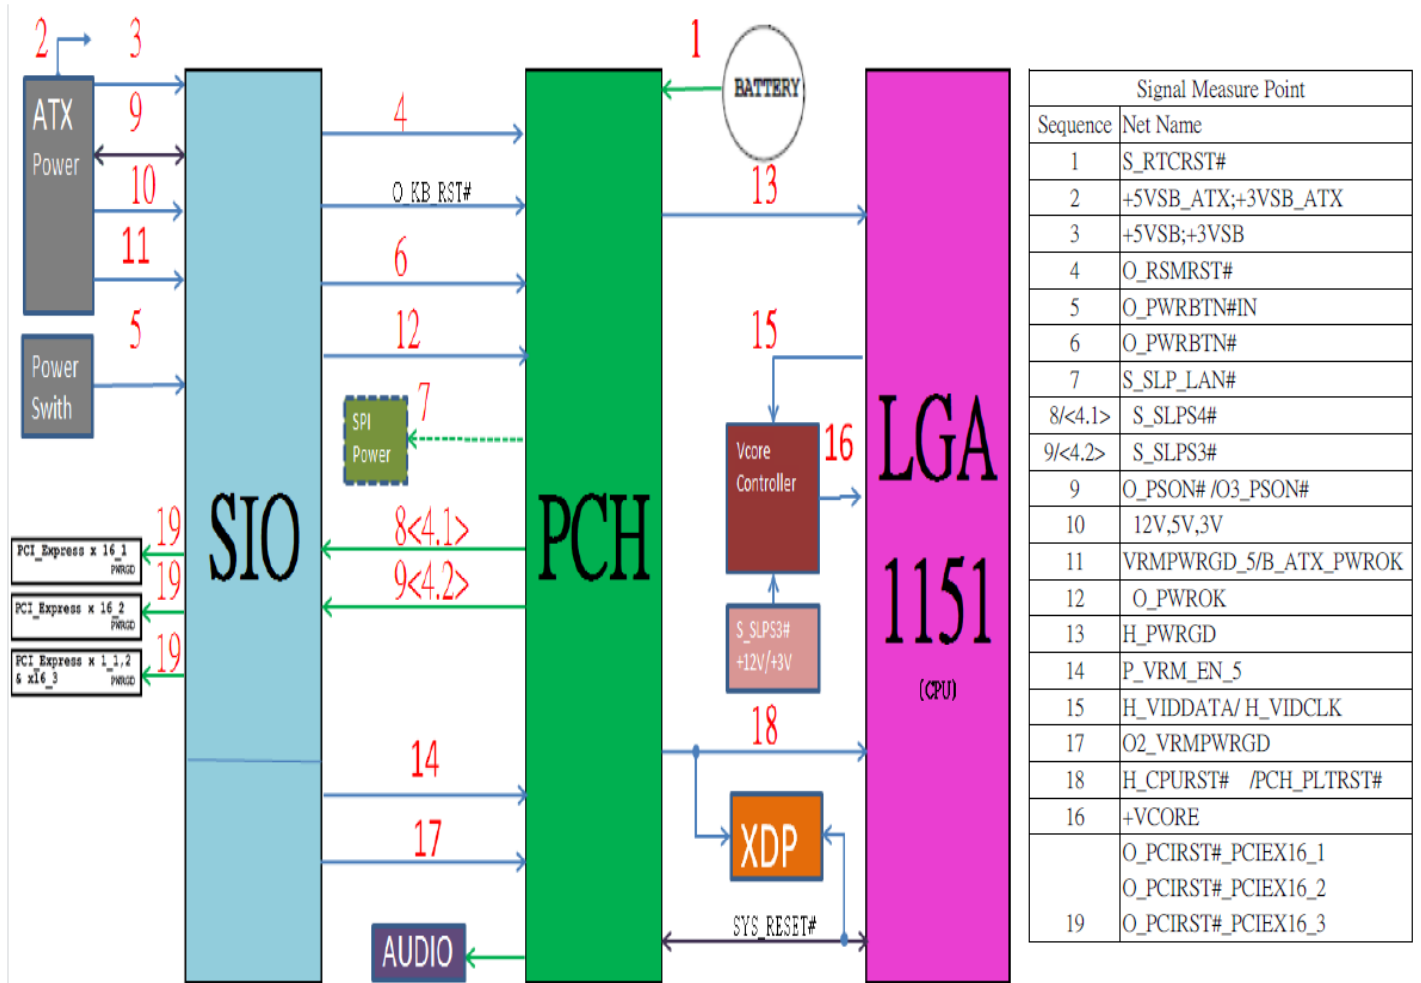


5. Timing Diagram for G3 to S5


G3→S5

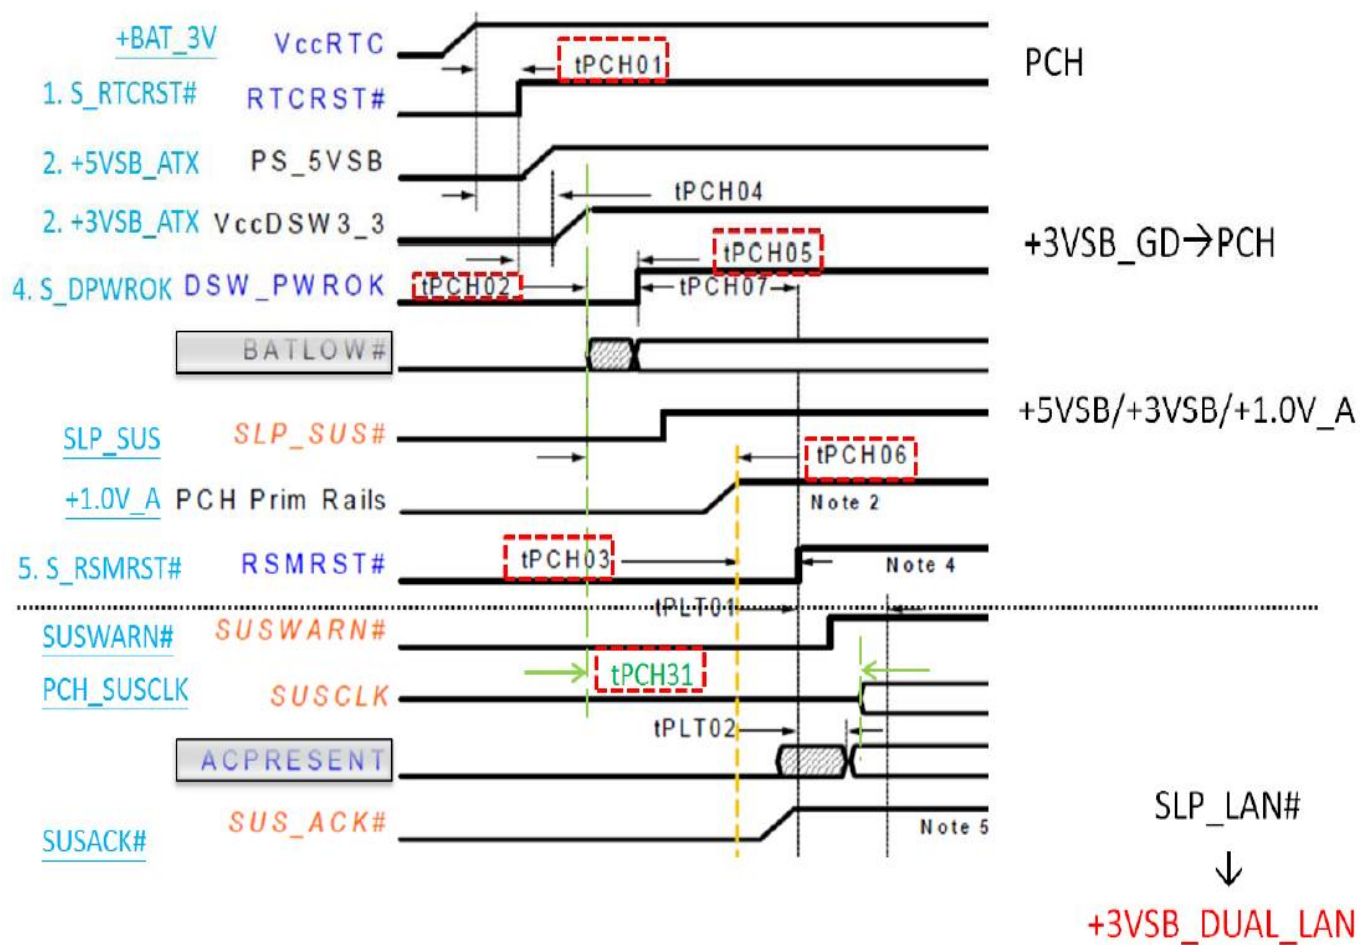


Timing Diagram for S5 to S0/M0

S5→S0

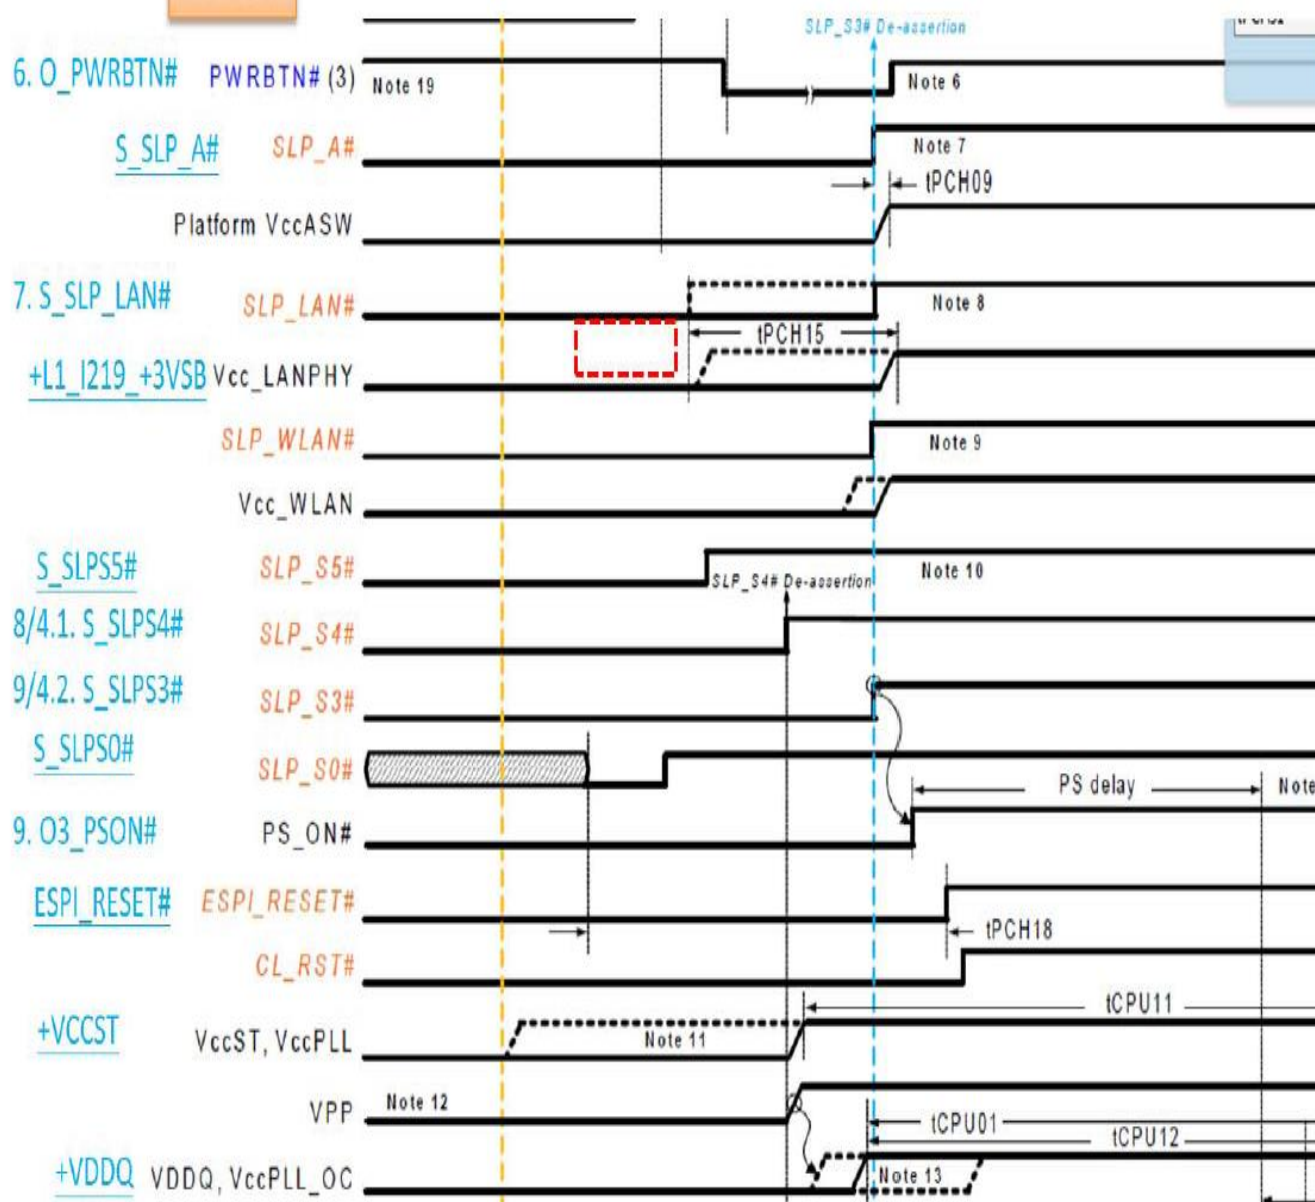

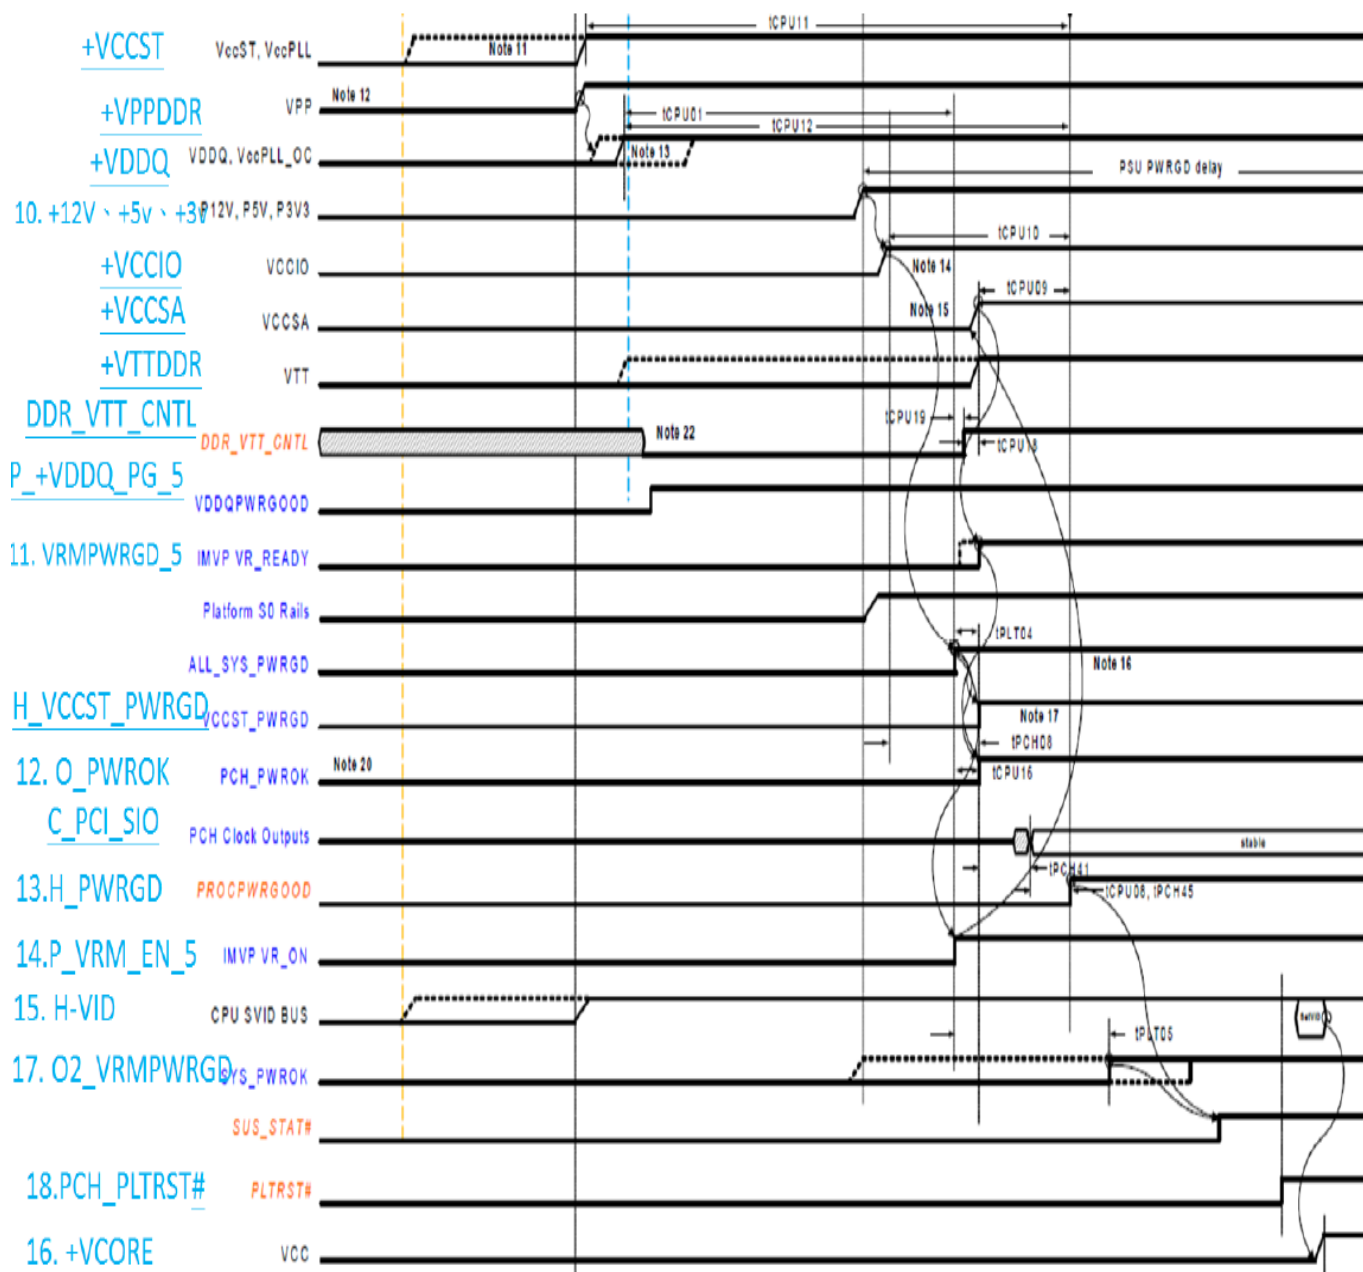

reggie l'andrebbe




7. Socket reflow profile

Profile Feature	SMD Pb-Free Assembly	DIP Pb-Free Assembly	SMT Component Vendor Spec	DIP Component Vendor Spec
Preheat/Soak	150 °C	80 °C	150 °C	135 °C
Temperature Min (T _{smin})	200 °C	135 °C	200 °C	need endure 80 seconds
Temperature Max (T _{smax})	120 seconds	120 seconds	need endure 120 seconds	
Time (t _s) from (T _{smin} to T _{smax})				
Ramp-up rate (TL to Tp)	3 °C/second max.	3 °C/second max.	need endure 3 °C/second max.	need endure 3 °C/second max.
Liquidous temperature (TL)	217 °C	NA	217 °C	NA
Time (t _L) maintained above TL	90 seconds		need endure 90 seconds	
Peak package body temperature (Tp)	260 °C	270 °C	260 °C	270 °C
Time (t _p)* within 5 °C of the specified classification temperature (Tc), see Figure 1-1.	10* seconds	6* seconds	need endure 10* seconds	need endure 6* seconds
Ramp-down rate (Tp to TL)	6 °C/second max.	6 °C/second max.	need endure 6 °C/second max.	need endure 6 °C/second max.
Time 25 °C to peak temperature	8 minutes max.	8 minutes max.	8 minutes max.	8 minutes max.


Note 1: All temperatures refer to the center of the package, measured on the package body surface that is facing up during assembly reflow (e.g., live-bug). If parts are reflowed in other than the normal live-bug assembly reflow orientation (i.e., dead-bug), Tp shall be within ± 2 °C of the live-bug Tp and still meet the Tc requirements, otherwise, the profile shall be adjusted to achieve the latter. To accurately measure actual peak package body temperatures refer to JEP140 for recommended thermocouple use.

2. DIP Plastic heat resistance capability :

- (1) Direct contact 270°C, 6 seconds
- (2) In-direct contact 230°C, 5 seconds
- (3) no contact 130°C, 5 seconds

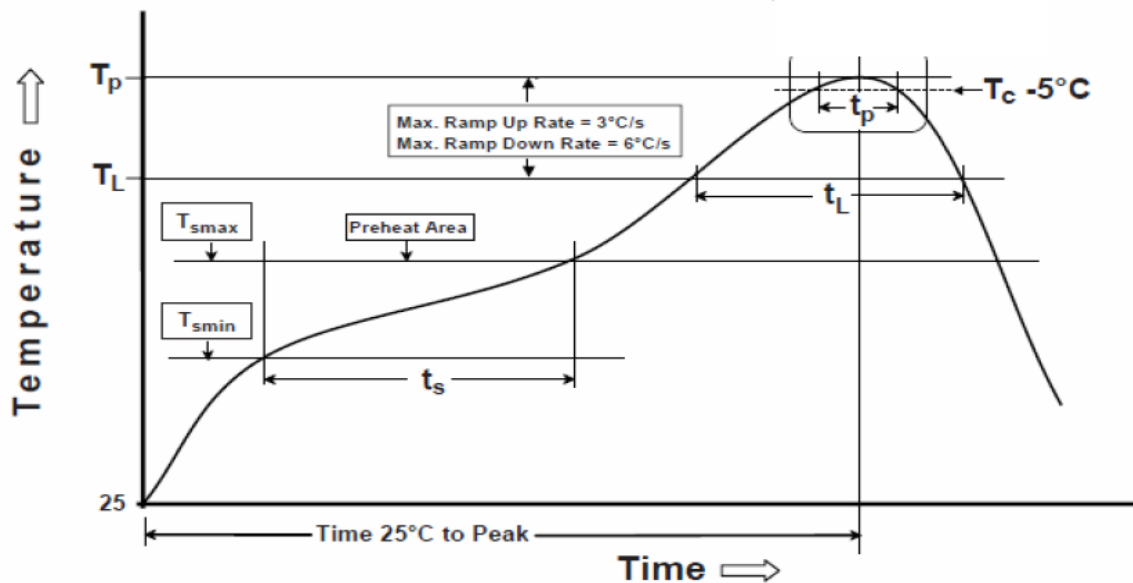

8. Lead-Free Rework Thermo profile Graphic for BGA & Chipset

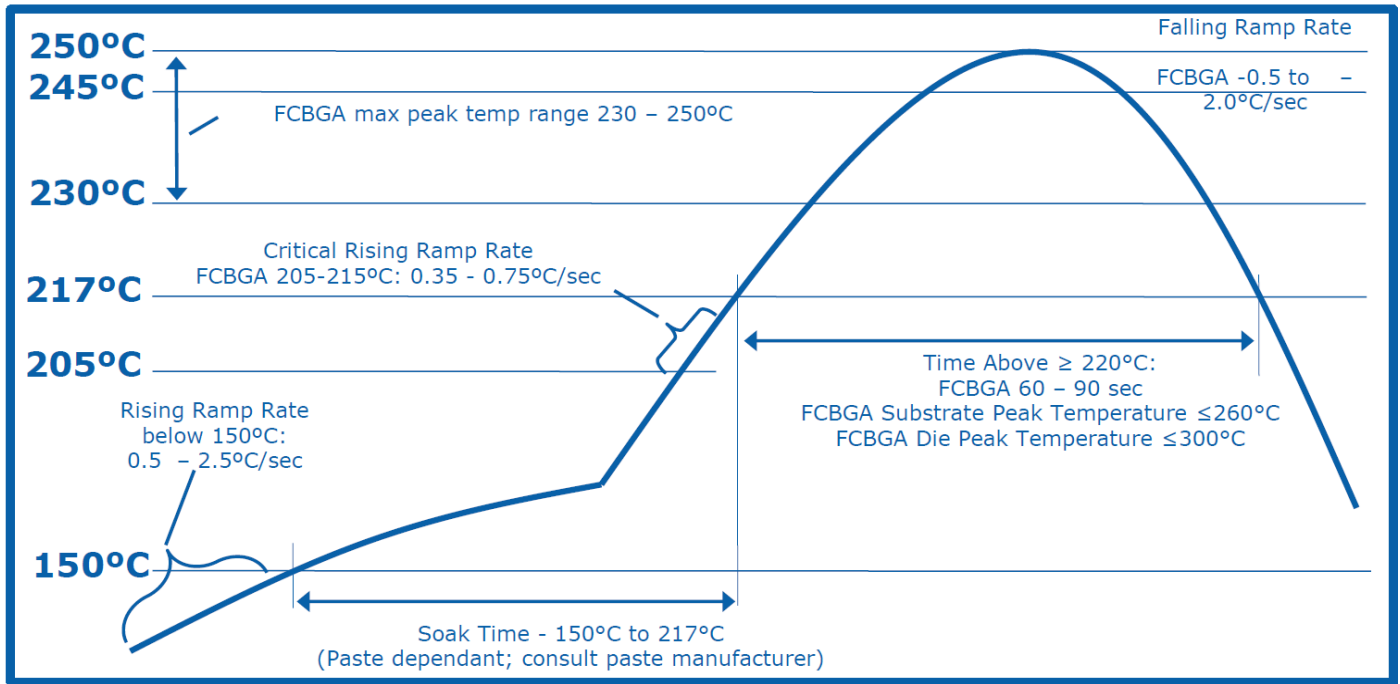

Except for body temp, all temperatures are measured with thermo couples inside solder joints, for better accuracy

Primary Factors for Successful Rework:

- Flux formulation and solder paste formulation and volume
- A capable thermal reflow profile
- Proper PCB pad solder preparation/wicking (clean-up of the residual solder from the PCB pads)

Caution: Always remove batteries and thermal solutions following the system design disassembly process steps prior to BGA rework to avoid damaging the BGA.

View this Intel®BGA / Socket Rework Video (10 minutes in length):

<http://link.brightcove.com/services/player/bcpid1409165005001?bckey=AQ~~,AAAQqwZd9wk~,X1Exj3sUi-03b71FGkEmVWbi4T4yGcor&bctid=1519232885001>

9. MB Baking Time: 120 °C, 8 hours

BGA Baking Time:

5.2 Floor Life The floor life of SMDs per Table 5-1 will be modified by environmental conditions other than 30 °C/60% RH. Refer to Clause 7 to determine maximum allowable time before rebake would be necessary. If partial lots are used, the remaining SMD packages must be resealed or placed in safe storage within one hour of bag opening (see 5.3). If one hour exposure is exceeded, refer to 4.1.

Table 5-1 Moisture Classification Level and Floor Life per J-STD-020

Level	Floor Life (out of bag) at factory ambient ± 30 °C/60% RH or as stated
1	Unlimited at ± 30 °C/85% RH
2	1 year
2a	4 weeks
3	168 hours
4	72 hours
5	48 hours
5a	24 hours
6	Mandatory bake before use. After bake, must be reflowed within the time limit specified on the label

Supplier Bake: Default Baking Times Used Prior to Dry-Pack that were Exposed to Conditions ± 60 % RH (“MET” = 24 h)

Package Body Thickness	Level	Bake @ 125° C +10/-0 ° C	Bake @ 150° C +10/-0 ° C
≤ 1.4 mm	2	7 hours	3 hours
	2a	8 hours	4 hours
	3	16 hours	8 hours
	4	21 hours	10 hours
	5	24 hours	12 hours
	5a	28 hours	14 hours
> 1.4 mm ≤ 2.0 mm	2	18 hours	9 hours
	2a	23 hours	11 hours
	3	43 hours	21 hours
	4	48 hours	24 hours
	5	48 hours	24 hours
> 2.0 mm ≤ 4.5 mm	5a	48 hours	24 hours
	2	48 hours	24 hours
	2a	48 hours	24 hours
	3	48 hours	24 hours
	4	48 hours	24 hours
	5	48 hours	24 hours
	5a	48 hours	24 hours

Note 1: If baking of packages > 4.5 mm thick is required see appendix B.

Note 2: The bake times specified are conservative for packages without blocking planes or stacked die. For a stacked die or BGA package with internal planes that impede moisture diffusion the actual bake time may be longer than that required in Table 4-2 if packages have had extended exposure to factory ambient before bake. Also the actual bake time may be reduced if technically justified. The increase or decrease in bake time **shall** be determined using the procedure in JEDEC JESD22-A120 (i.e., < 0.002 % weight loss between successive readouts) or per critical interface concentration calculations.

10.Voltage Measure Point

Voltage Measure Point		
Station	Net Name	Diode resistance
Pu4001	+3VSB_ATX	484
PQ4002	+5VSB	850
PL1021	VCORE	608
OQ760	+3VSB	643
PL2011	VDDQ	280
EATXPWR	+5VSB_ATX	1080
PQ4501	+5VSB_DUAL	839
PR5034	+12V	1050
EATXPWR	+5V	545
O1R4	+3V	17

11.Signal Measure Point

		Signal Measure Point	
Station	Sequence	Net Name	Diode resistance
SC59 SC605	1	S_RTCRST# S_SRTCST#	NA NA
NA	2	AC Power Switch ON	NA
PQ4002 OQ760	3	+5VSB +3VSB	850 643
NA	3.1	S_PWROK	NA
O1R1	4	O_RSMRST#	17
O1R6	5	PWRBTN#	1651
O1R68	6	O_IOPWRBTN#	970
O1R11	7/4.2	S_SLP_S3#	1108
NA	7	S_SLP_A#	NA
NA	7.1	S_SLP_LAN#	NA
O1R10	8/4.1	S_SLP_S4#	1154
EATXR16	9	ATX_PSON#_R	NA
PQ890 X1CE1 O1R4	10	12V 5V 3V	1339 758 17
NA	11	P_PWROK_PS	NA
O1R12	12	O_PWROK	34
SR75	13	H_CPUPWRGD	NA
PR1054 PR1056	14	H_SVID_DATA H_SVID_CLK	571 570
PL1011	15	VCORE	608
SQ6	16	P_VR_READY_10	456
L1C14	17	S_PLTRST#	882
ESDC3	18	H_CPURST#	316
O1R1002	19	O_X1_RST#	NA